

MINING | CONSTRUCTION | TUNNEL DRILLING | FORESTRY | AGRICULTURE | HEAVY EQUIPMENT

Revolutionary Fire Suppression Systems



Made in Germany



UNECE

VdS approved products
approved systems

SPCR183

SPCR199

AIS135

SBF127

UNECE R-107

TUVNORD **DMT**



Deutsche Steinkohle



detexline 4MC

ROBUST - PATENTED - UNIQUE!

*The need for simplicity and robustness makes
Detexline 4MC the leading solution for
Heavy Machinery Fire Suppression*



Designed for:
Mining vehicles
Construction vehicles
Defense vehicles
Tunneling machinery
Forestry machinery
Agricultural machinery
Construction machinery






Efficiency & Robustness

high resistance to shocks & vibrations

100% Stainless Steel

No plastics in the core system

NO FALSE ACTIVATIONS

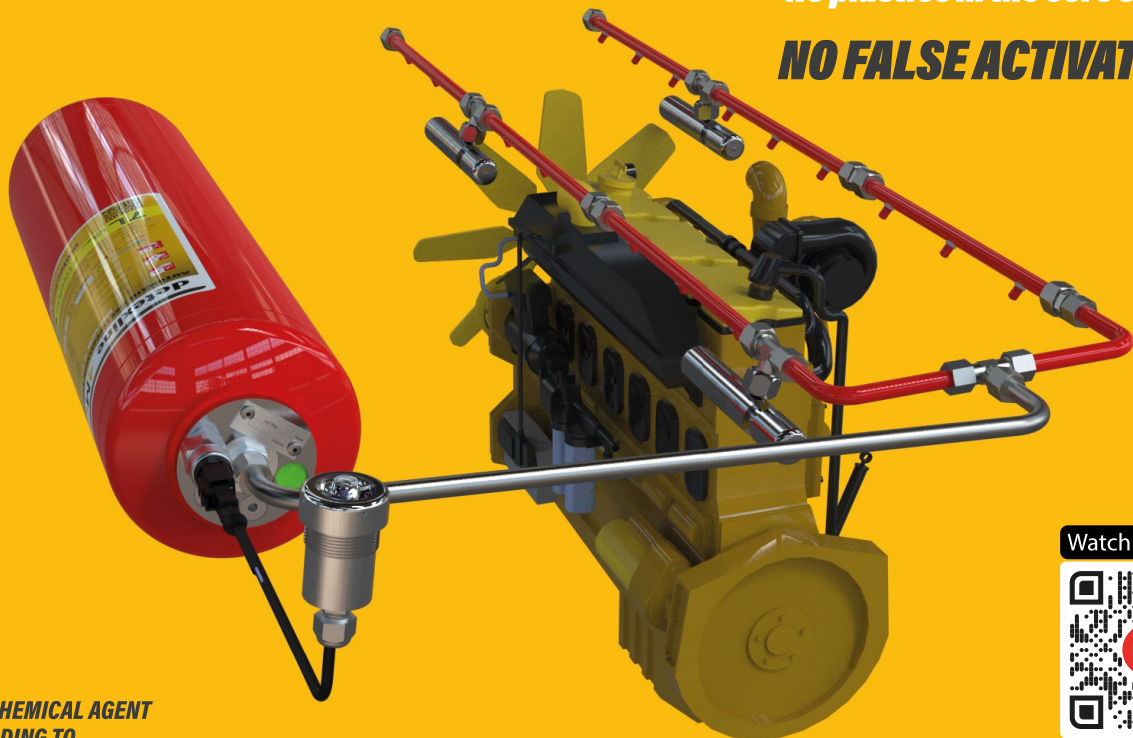

**WET CHEMICAL AGENT
ACCORDING TO
NFPA 17-A**

Watch the video



**TiboRex
ABSOLUTE**

The power of liquid extinguishing agent

A large amount of fine droplets of liquid agent is sprayed through the special patented nozzles forming an immense cooling reaction surface. As a result, the fire will be quickly deprived of thermal energy, leading to a rapid temperature drop. The cooling effect breaks the reaction necessary to support combustion.

In addition, after the entire extinguisher has been dispensed, nitrogen propellant gas will be discharged from the patented container, resulting in a hybrid suppression system, also ensuring fire suffocation.



The BEST temperature range!

-50°C to +80°C

LIQUID FIRES

Fuel, lubricant and hydraulic fluids

SOLID FIRES

Plastic, rubber, wood, sawdust, wires, cables

ELECTRICAL FIRES

Electrical cabinets, substations, transformers and other equipment



Fully Pneumatic - Self Contained

detexline 4MC

SPY - Thermo-pneumatic detector


Patented
Multiple temperature ranges
Sensitive to hidden fires
Robust and accurate
Stainless steel

Fine Spray Nozzles

Patented
75° angle spraying
Robust and precise
Stainless steel
Very small and fits virtually anywhere

Optical and Acoustic Alarm

Compact control panel
Acoustic signal
Test button

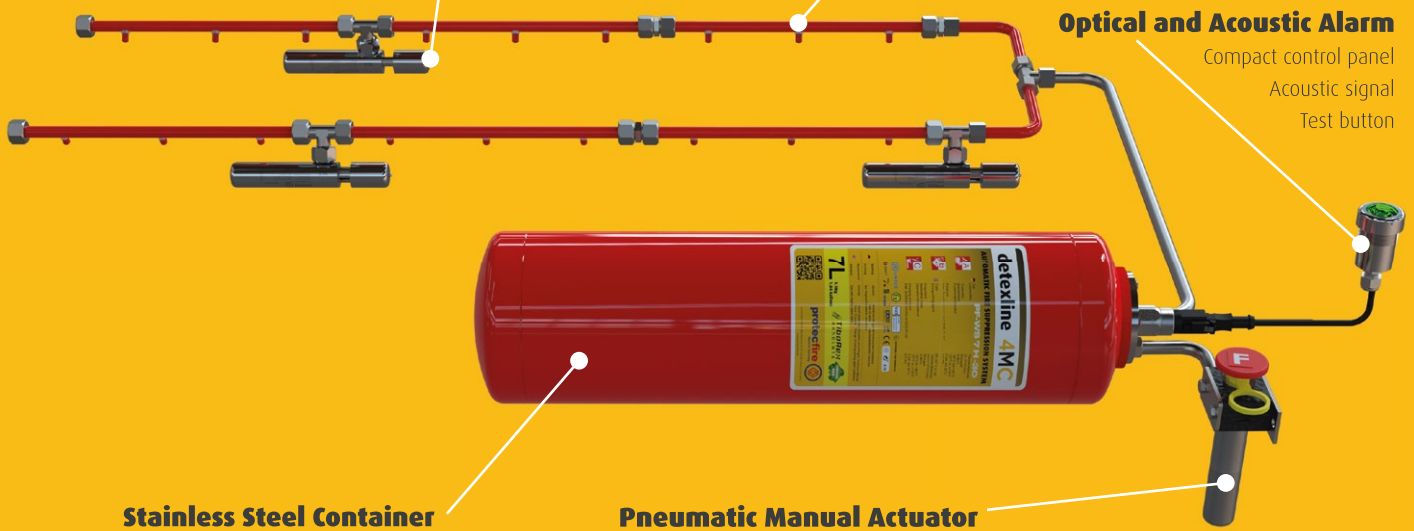


Stainless Steel Container

Safe and robust
Internal activation system
Maintenance free
Stainless steel

Pneumatic Manual Actuator

Unique patented pneumatic activation system
Stainless steel
Safety locking system
Argon gas activation

detex360 version

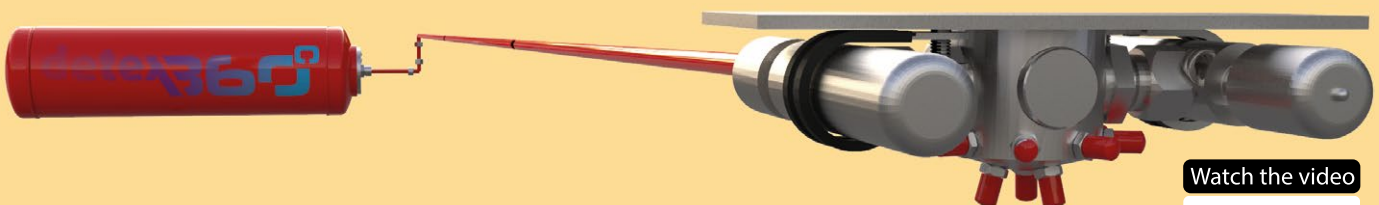

360 degrees of fine spray and detectors, all in one piece.

A compact single-unit system with detection and extinguishing. The fastest to install!
This system is optimised for a homogeneous fine spray dispersion throughout the whole compartment.
The nozzles cover all directions for effective dispersion.

Watch the video





Single-Line System (det-ex)

Detection and extinguishing in a single pipe line.



No Pressure

Extinguishing agent container and tubing are pressure-free in operating state.



No Electricity

No electricity needed in the system.



5 Years - No Parts Change

Long-term savings - durable and resistant system.



Ultra-Fast Detection

Response speed: Ultra Fast Response RTI 12.
False alarm proof. Activation is based on "temperature" parameter for pneumatic activation.



Operation Temperature Range: -50°C to +80°C

Prepared for extreme climates, whether in the desert or the mountains.



Capable of Working in Extreme Conditions

Shock and vibration resistant.



Stainless Steel

Precision manufacturing - highly durable stainless steel.



Very low Maintenance

Due to simplicity and absence of pressure, maintenance routines are practically only visual.



Fully Mechanical / Pneumatic

The entire system is self-contained. It does not require manual operations and does not depend on external controls, such as control panels or electrical detectors.

Possibility of multiple temperature ranges in a single system:
57°C | 68°C | 79°C | 93°C | 110°C | 141°C | 182°C | 230°C | 260°C

Operational in highly ventilated places and in open spaces



Extinguishing Agent

Liquid - TiBorex Absolute



Can be installed in Any Position/Angle

Watch the video





detexline 4MC

Long-Term Savings

VdS ISO9001
approved products
approved systems

NEW CERTIFICATIONS

- SPCR183
- SPCR199
- AIS135
- SBF127
- UNECE R-107

Factors that make Detexline the most economical system:

Almost maintenance-free for 5 years:

No need for the usual annual maintenance as it is not pressurized!

No False Alarms:

Patented, accurate and reliable detection system.

Durable Material Construction

All essential equipment components are crafted from stainless steel.

How it Works

The detexline tank and piping are not pressurized.

The SPY detectors will be activated by thermal detection, thus releasing the pressure in the pipeline and cylinder control valve, which in turn will trigger the release of the extinguishing agent.

Fine spray nozzles will disperse the Tiborex Absolute providing the cooling effect and effectively extinguishing fires within the first few seconds.

It can be manually activated remotely.

An alarm and test button can be installed.

Name	detexline 4MC
Temperature Range	-50°C / -30°C to 80°C
Detection Technology	Rise of Pressure
Detection and Extinguishing Line	One integrated line
System Pressure	No pressure
Detection Technology	SPY detection element - Stainless steel
Trigger Temperature	Glass ampoule, 9 independent temperatures
Lifecycle of Detectors	5 years
Nozzle Type	S1
Extinguishing Agent	Tiborex Absolute
Extinguishing Agent Volume	4, 7, 14, 24L
Extinguishing Technology	Fine spray technology
Extinguishing Container (pressure)	Pressureless (Sealed Cartridge)
Product Material	Stainless steel
Alarm Signal Switch	Yes
Maintenance Inspection	Annually
Parts Replacement Duration	5 years

Certifications for protectfire various systems:





System components




SPY thermo-pneumatic detector

- Unique patented detector
- No electricity required
- High-grade stainless steel
- Response speed: Ultra Fast Response RTI 12
- Available detection temperatures:
57°C | 68°C | 79°C | 93°C | 110°C | 141°C | 182°C | 230°C | 260°C



Fine-Spray Nozzles

- Unique patented nozzle solution
- Quick and easy to install - Reduces installation time by ~70%
- Very small - Virtually fits anywhere
- Stainless steel
- S1 factor 0.5 - Fine spray technology
- Up to 75° spray pattern
- High quality, heavy-duty nozzle caps



detex360

- Multi-directional fine dispersion nozzles and detectors in one piece.
- Very small - Virtually fits anywhere
- Stainless steel
- S1 factor 0.5 - Fine spray technology
- Up to 90° spray pattern on each nozzle - high coverage.
- Unique in the world.




Extinguishing Agent Tank

- Patented - Unique Pneumatic Release System
- Can be placed in any position!
- Stainless steel with electrostatic paint finish Ral3000
- Patented - Stainless steel actuation system



Liquid Agent: Tiborex Absolute - exclusive protectfire agent
Effective against liquid, solid and grease fires.



Pneumatic Manual Actuator

- Unique patented pneumatic activation system
- Stainless steel
- Safety locking system
- Argon gas activation



Alarm/Test Panel

- Easy to install
- One-button operation for testing
- Buzzer for alarm
- Optical LED light for test/alarm



Liquid extinguishing agent

- Ultra-Rapid Extinguishing
- Cooling and Blanketing effect
- Environmentally Friendly (non-toxic | biodegradable)
- Fluorine Free
- Residue control possible with ultraviolet light



Extinguishing Agents Comparison

	TiboRex Absolute	Water	Foam	Powder	Gas
Fast Temperature Reduction	+	-	-	-	-
Surface Blanketing	+	-	+	-	-
Quenching Effect	+	-	+	-	+
Fine-Spray Technology	+	+	-	-	-
Fluorine Free	+	+	-	-	+
Temperature Range -50°C to +80°C	+	-	-	+	-
Danger to Persons	+	+	-	-	-

Ultrafast extinguishing

Only small amounts of extinguishing agent required. Tiborex rapidly delivers a huge cooling power. The object to be protected remains almost undamaged.

Ultrafast cooling

Enormous reduction of surface temperature. Avoidance of re-ignition. Reduced effect of fire. Quick interruption of combustion process.

The cooling effect

The enormous cooling effect of Tiborex Absolute is mainly based on **two physical properties**:

Cooling effect due to water evaporation: The fine-spray nozzles developed specially for Tiborex Absolute produce very fine droplets of less than 100µm, when discharging the extinguishing agent. As a result, ultra-fast evaporation of the liquid share in the extinguishing agent is achieved. Due to the required enthalpy of evaporation of 2.26 MJ/kg (equivalent to 1 litre of water), energy is extracted from the burning object in a minimum of time and it cools down substantially.

Cooling effect due to sublimation: During the evaporation of the aqueous phase some of Tiborex Absolute's main components form crystalline structures. With the still existing combustion temperature, these solid structures change from the crystalline phase to a gaseous phase. The enormous enthalpy of evaporation (heat) required for this amounts to 7.23 MJ/kg.

Quenching effect

Rapid removal of thermal energy therefore removing heat, hence no combustion or fire in hidden cavities.

Blanketing fat and oil fires

When mineral, animal or vegetable fats and oils burn, Tiborex Absolute uses chemical reactions to form a closed, gas-proof protective layer quenching the fire and protecting the hot fat or oil from re-ignition by cooling them down very quickly.

Residue monitoring and guaranteed quality


Residues of the extinguishing agent on the object can be identified with the help of ultraviolet light. A chemical analysis (DNA) can verify and confirm that the original Tiborex Absolute was used.

Environmental sustainability


Ecological and 100% fluorine-free extinguishing agent. Biodegradable. Non-toxic to humans and animals.

3 stages fire suppression


1 Cooling Effect Fine Spray Droplets that penetrate fire

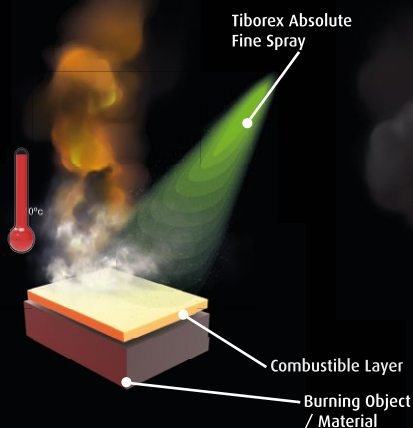

2 Oxygen Suffocation by evaporation

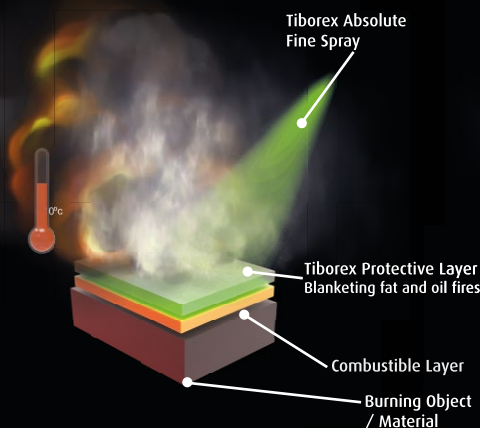

3 Ultra Cooling through Sublimation Layering with solid crystals that convert to gas

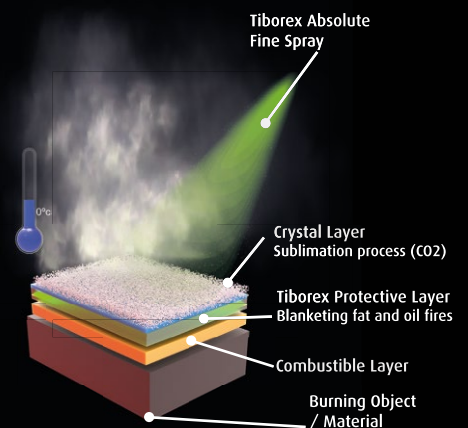



Automatic Fire Suppression Systems for: Off-Road vehicles | Mining | Construction | Tunnel Drilling | Heavy Machinery



protecfire GmbH
Weidekamp 10
D-23558 Lübeck
Germany

Tel.: +49 (0) 451 399 61-10
Fax: +49 (0) 451 399 61-20
@: info@protecfire.de
www.protecfire.de

Authorized Distributor



Brochure Information / Warning
Detexline 4MC 04092024

The information may be subject to errors and is not binding. The information and specifications may change without prior notice.
The information or images may be subject to errors or may be only representations.
All rights reserved.
The 3D models are intended to support the visualization and application of our products solely for educational, research, and informational purposes. While efforts have been made to ensure the accuracy and reliability of the models, it is recommended that their use be strictly limited to the purposes of product evaluation and demonstration, complementary use for examples of product installation, and original inspiration for Protecfire products.

art. 04092024.j1-protecfire-Detexline-4MC
ENGLISH - for europe



Automatic Fire Suppression Systems for: Off-Road vehicles | Mining | Construction | Tunnel Boring | Heavy Machinery

detexline 4MC

www.protecfire.de

